



森霸传感科技
SENBA SENSING TEC.

Mini SMD Programmable AD Pyroelectric Infrared Sensors

S22-P340R

V1.2

森霸传感科技股份有限公司

森霸传感科技股份有限公司

森霸传感科技股份有限公司 / 广东
Túμ XXX ΩβσΩöł ŐűΨ

3.5

	TST	-20	70	
	θ	X=110 °	Y=90 °	°
	TST	-30	80	
	λ	5	14	μ m

$$\hat{W} / I \quad F_m \quad "$$

R 4

 $\hat{W} / Y$

16ms


64us (tcl)

“ 0 ”

—

3.7.4

DOCI

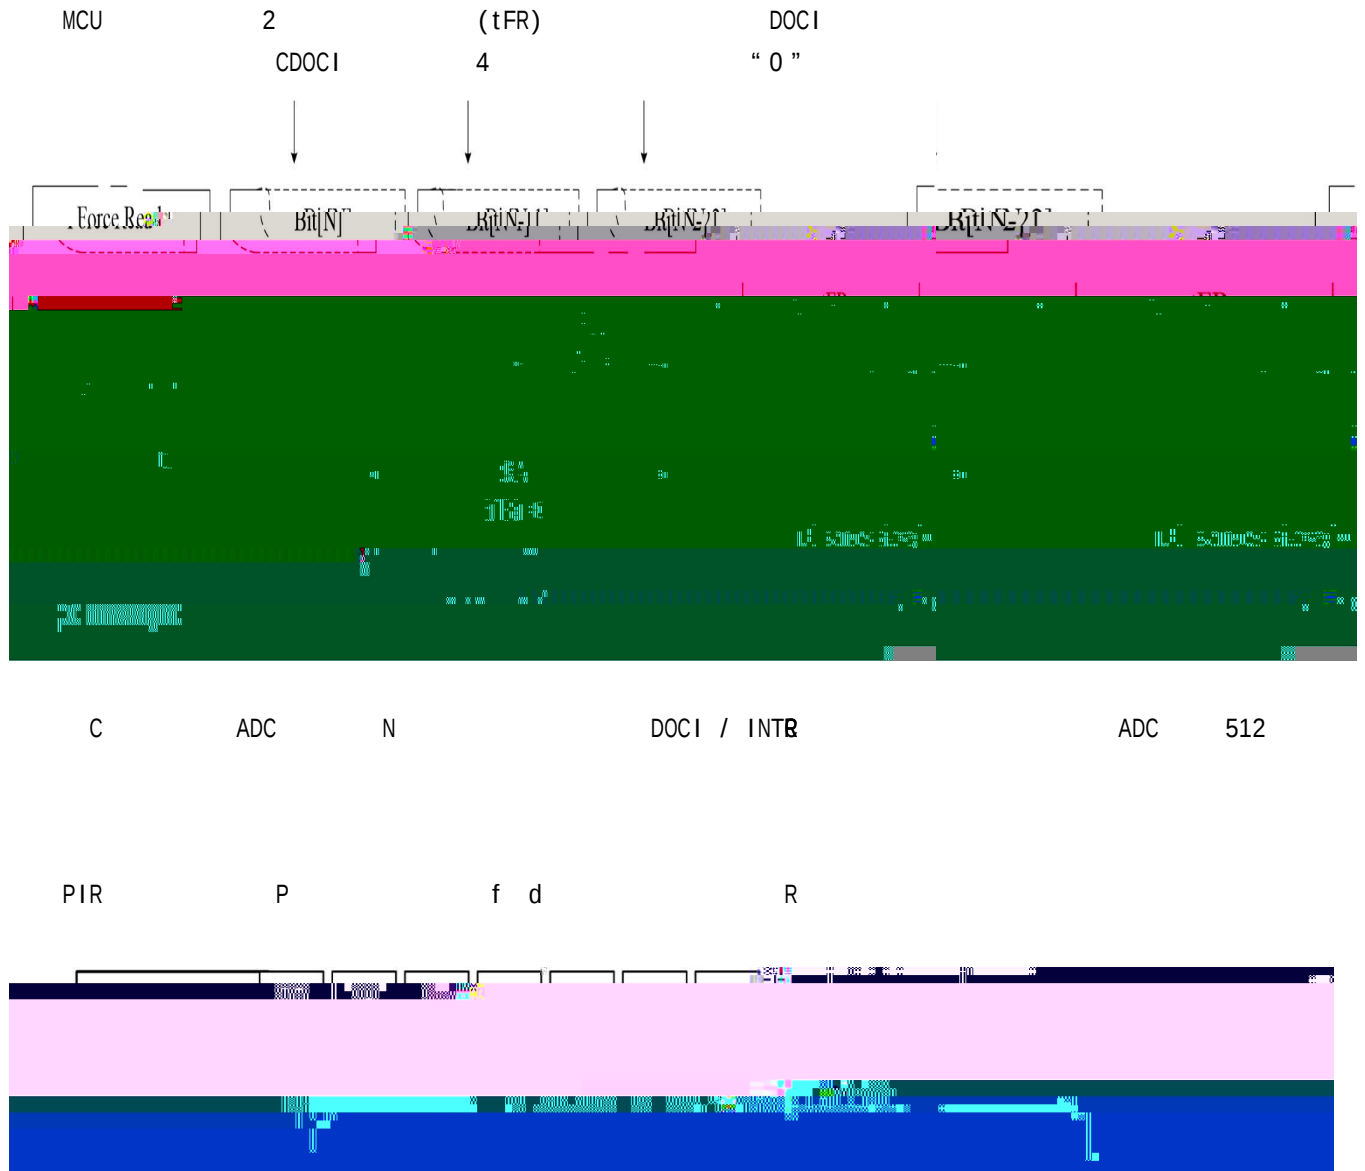

		0 = PIR (HPF)	1 = PIR (LPF)
[6:5]	[1:0] ADC	2 =	3 =
[4:1]			
[0]	[m m 1= ' 1 Z 1 0 0 m P' - Em]		

[m m 1= ' 1 Z 1 M G 0 m P l' P m y' p 5 y o s p A z n B ' F i P 3 7 h q]

$$a \perp b \perp \{a, 5\}$$

a 00 { a 5 50° 0' 1" t 100\$ 50° 0' 1" 100° 0' 1" { 50° 0' 1"

5.

$$\begin{array}{ccccccc} & & 3 & 5^3 & & & \\ & & & & & & \\ 1 & & 3 & 3 & 3 & 5^3 & 55^3/7^3 \ 5^3 \end{array}$$

3

3

3

Τύπος XXX ΩΒΙΣΣΩ04 00Ψ

$B^3 \quad 3 \quad 5^3 \quad 3 \quad 3 \quad 3$

