




Linear Environmental-friendly Optoisolator

LLI 220

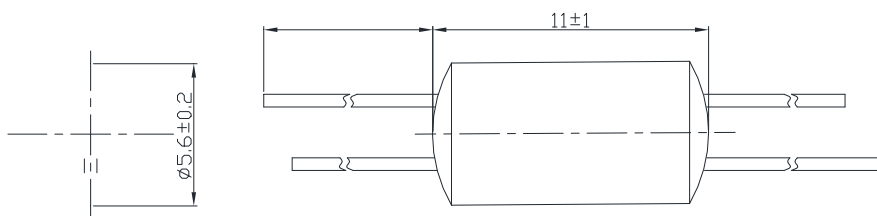




	LLI
	25 48%-52%
()Vf	1.8—2.2 Vdc
()IF	0-10mA
I _r	V _r =5Vdc max10μA
VR	5Vdc
	5pF
	5Vdc max30Vdc
	0.1mA
	10mA 90--140μA
	2.5ms
	300KHz
PD	100mW
Topr	-25—+70
Tstg	-30—+80
ESD	2000V

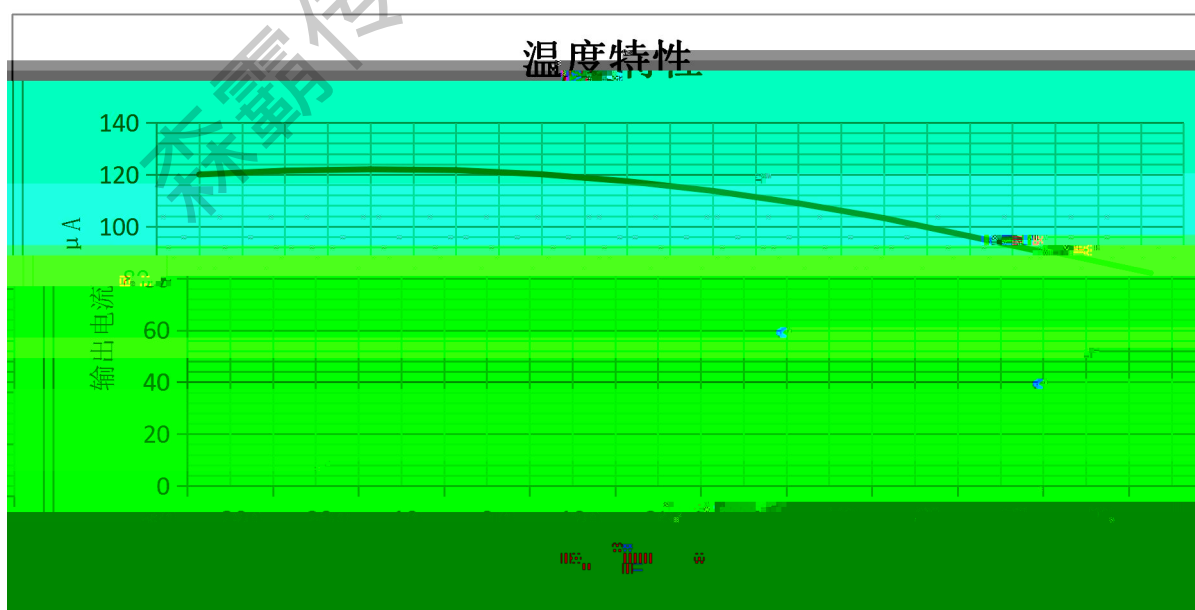

25


10mA


输入输出特性

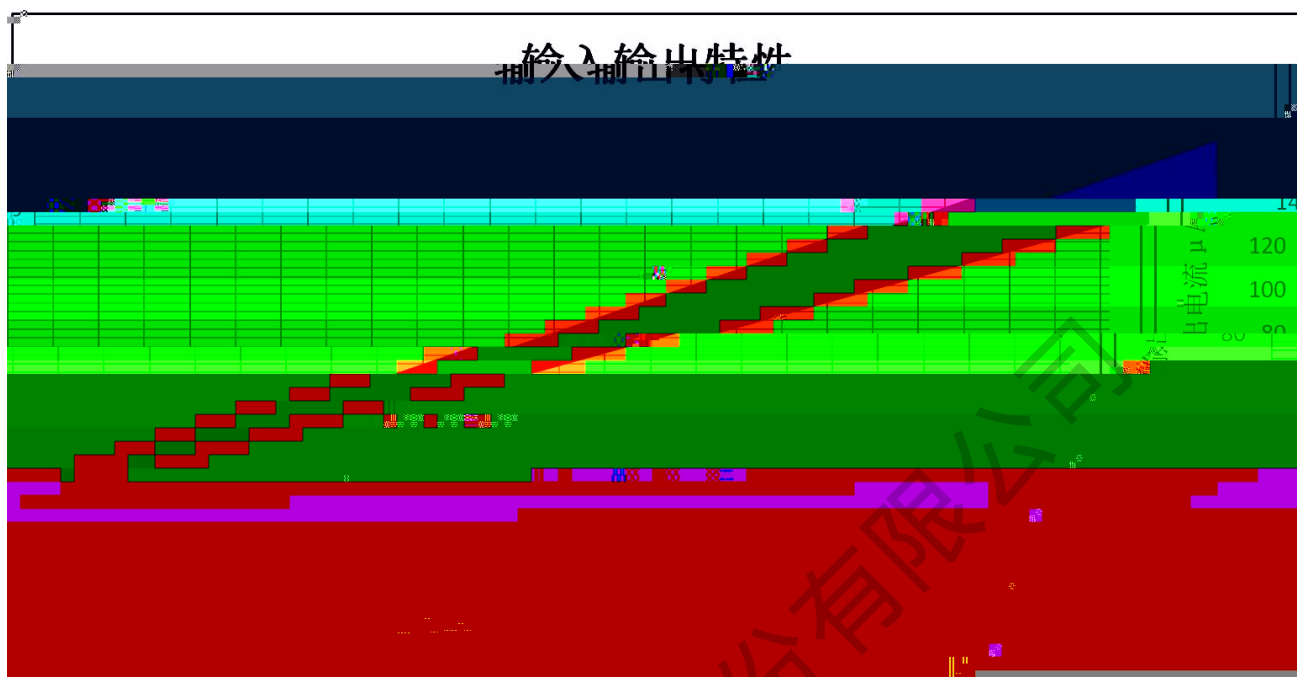

25

48%--52%

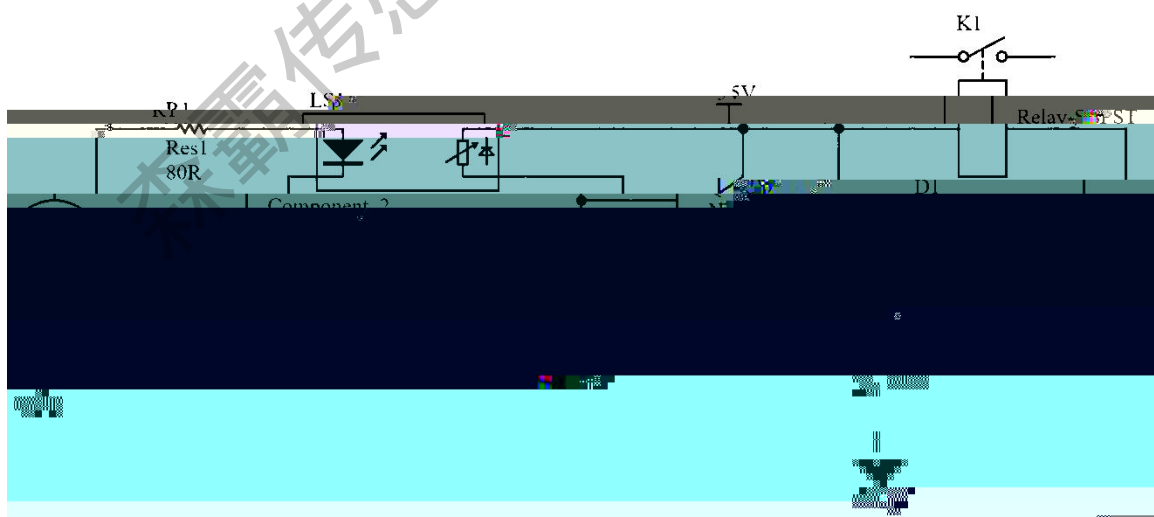


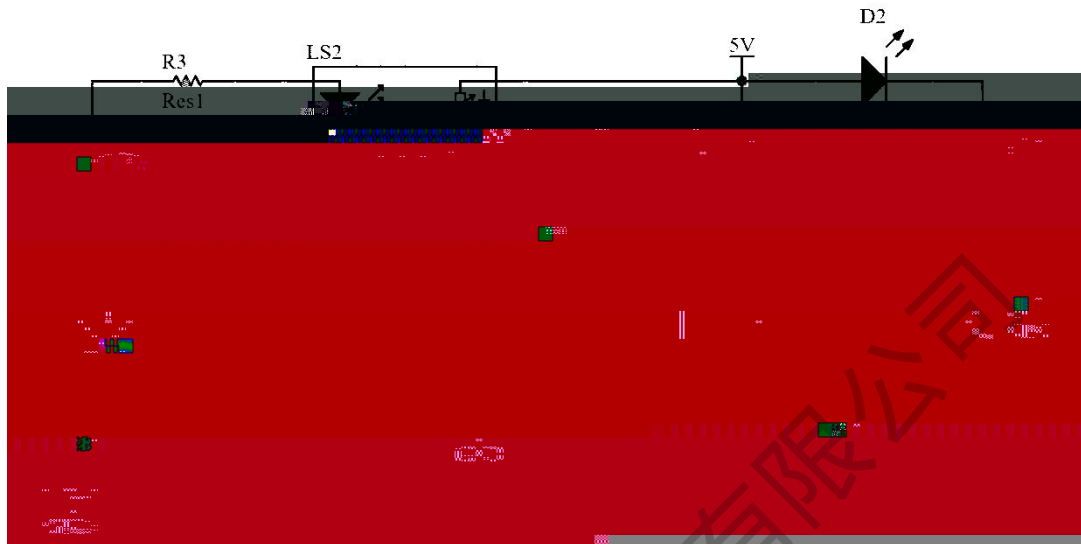

LED

100k

LED

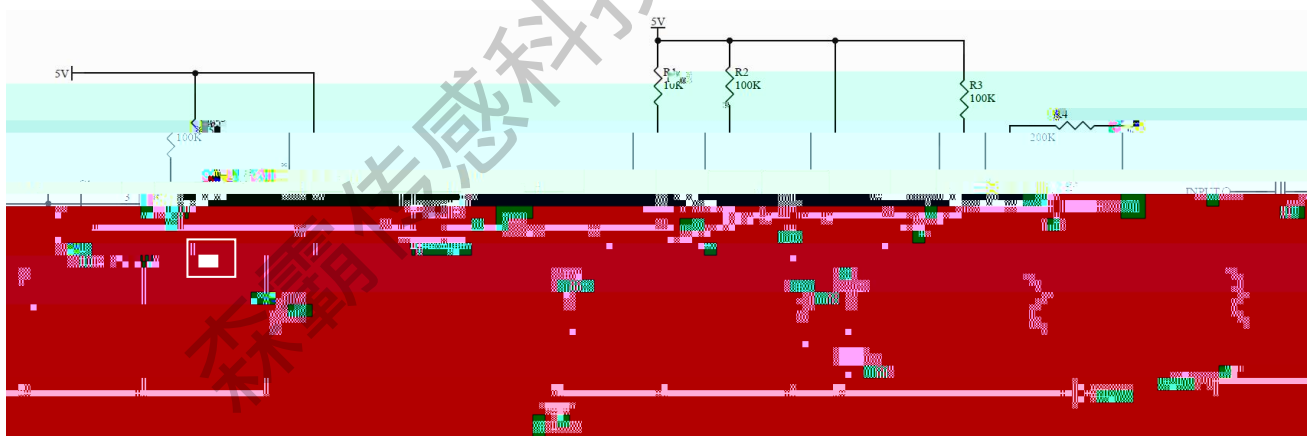

Cds

R11

LED

R12

